

# FBG for fiber laser


## Technica SA

### Applications

- High power fiber laser
- Ultra-fast fiber laser

### Key Features

- Excellent wavelength control
- High sidelobe suppression ratio
- High reflector & output coupler
- High power handling
- Low insertion loss
- Narrow & broad bandwidth selection

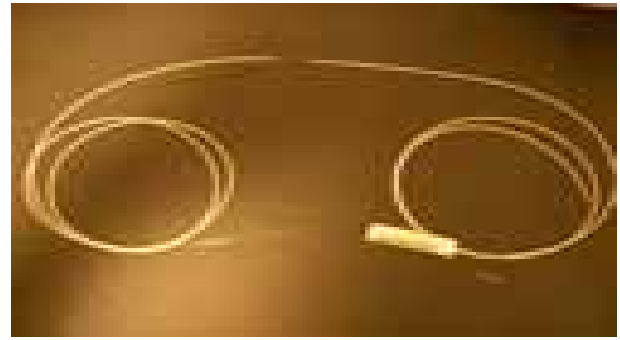

### Description

Fiber laser is an emerging technology for industrial material processing including laser cutting, laser marking, laser welding and laser drilling. Fiber Bragg Grating is a critical component inside fiber laser which is used to form the lasing cavity.

Technica offers flexibility to produce high reflectors and output couplers on different kinds of fibers including single mode fiber, PM fiber, large diameter fiber and double-clad fiber.

### Specifications

Parameter	Unit	Specifications	Tolerance
Center Wavelength	nm	1050 – 1070 1460 – 1490 1512 – 1588	+/- 0.25 nm +/- 0.25 nm
Reflectivity	%	1% - 99%	+/- 0.5
FWHM Bandwidth	nm	0.05 - 2	+/- 0.01
Grating Profile	-	Apodised	SLSR >15 dB
Fiber Type	-	Corning HI980/PM980 or equivalent Corning HI1060 or equivalent Corning SMF 28/ Panda PM Double-clad fiber	-
Tensile strength	kpsi	>100	-
Recoating	-	Acrylate or low index polymer	-
Fiber length	m	Min. 2.0	-
Optical Connector	-	No connector, FC/APC, FC/UPC	-

### MOI Beijing Representative

Address: Room 210, Xianfeng Building No.7 Shangdi  
Kaituo Road, Haidian District, Beijing, China

Zip: 100085

Telephone: 86-10-62962540/62962541

Fax: 86-10-62962543

Email: [info@micronoptics.com.cn](mailto:info@micronoptics.com.cn)

Website: [www.micronoptics.com.cn](http://www.micronoptics.com.cn)



**Micron Optics, Inc.**  
1852 Century Pl, NE  
Atlanta, GA 30345  
ph: 404/325-0005  
fax: 404/325-4082  
[www.micronoptics.com](http://www.micronoptics.com)